


2U NEBS Rackmount Enclosure

2U NEBS-quality enclosure, 6U 4-slot CompactPCI backplane with rear I/O and dual 300 watt hot swappable power supplies.

PN: OSS-CPCI-2U-ENCL-CC-300

Features

- Four-slot hot swap backplane
- Two 300 watt hot swappable power supplies
- Two front-loading hot swap fans in canister
- Hot swappable rear exhaust fan
- Front or center-mounted rack ears

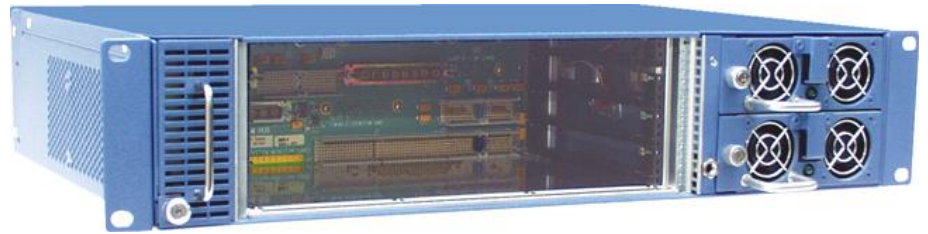

Specifications

Dimensions:	2U (3.5") high x 17" wide x 11.87" deep
AC:	Input on rear panel
Dual -48VDC:	Input with isolation diodes on rear panel
Power Supply:	<ul style="list-style-type: none"> • Dual 300 watt hot swappable • Outputs: +5 @ 30A, +12V @ 11A, -12V @ 1A, +3.3V @ 22A, -5V @ 1A • Front panel On/off switch on each power supply • 2 air intake fans on each power supply module
Backplane:	<ul style="list-style-type: none"> • 4-slot hot swap cPCI backplane with transition module support with VIO set to 5V • Includes 66Mhz operation through jumper
Cooling:	<ul style="list-style-type: none"> • Two front-loading hot swap fans in canister • Hot swappable rear exhaust fan • Removable filters over all air intakes
Rack Ears:	<ul style="list-style-type: none"> • 19" or 23" rackmount • Provisions for front or center-mounted rack ears
Construction:	Steel, gold zinc oxide
Agency:	Designed to meet UL/EMI requirements and NEBS Level 3 and Earthquake 4 requirements