




## 2U NEBS Rackmount Enclosure

2U NEBS-quality enclosure, 6U 4-slot CompactPCI backplane with rear I/O and dual 300 watt hot swappable power supplies.

PN: OSS-CPCI-2U-ENCL-CC-300

### Features

- Four-slot hot swap backplane
- Two 300 watt hot swappable power supplies
- Two front-loading hot swap fans in canister
- Hot swappable rear exhaust fan
- Front or center-mounted rack ears

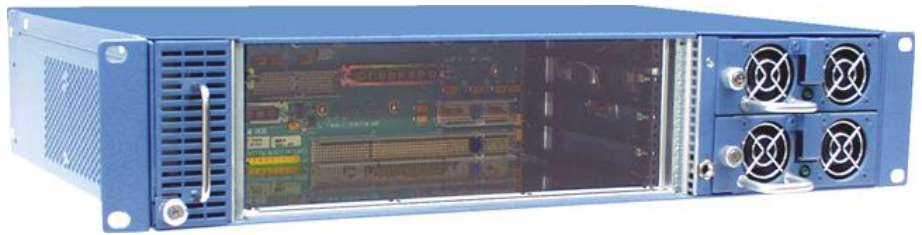

## Specifications

<b>Dimensions:</b>	2U (3.5") high x 17" wide x 11.87" deep
<b>AC:</b>	Input on rear panel
<b>Dual -48VDC:</b>	Input with isolation diodes on rear panel
<b>Power Supply:</b>	<ul style="list-style-type: none"> <li>• Dual 300 watt hot swappable</li> <li>• Outputs: +5 @ 30A, +12V @ 11A, -12V @ 1A, +3.3V @ 22A, -5V @ 1A</li> <li>• Front panel On/off switch on each power supply</li> <li>• 2 air intake fans on each power supply module</li> </ul>
<b>Backplane:</b>	<ul style="list-style-type: none"> <li>• 4-slot hot swap cPCI backplane with transition module support with VIO set to 5V</li> <li>• Includes 66Mhz operation through jumper</li> </ul>
<b>Cooling:</b>	<ul style="list-style-type: none"> <li>• Two front-loading hot swap fans in canister</li> <li>• Hot swappable rear exhaust fan</li> <li>• Removable filters over all air intakes</li> </ul>
<b>Rack Ears:</b>	<ul style="list-style-type: none"> <li>• 19" or 23" rackmount</li> <li>• Provisions for front or center-mounted rack ears</li> </ul>
<b>Construction:</b>	Steel, gold zinc oxide
<b>Agency:</b>	Designed to meet UL/EMI requirements and NEBS Level 3 and Earthquake 4 requirements