



4 Slot 3U CPCI Backplane with P47 Power Connector


4-slot cPCI backplane, 32-bit CompactPCI bus on P1, pass-through connectors for rear I/O on P2, P47 power supply connector (RH).

PN: OSS-CPCI-3U-BP-4-32/33-P47-R-3.3

PN: OSS-CPCI-3U-BP-4-32/33-P47-R-5

Features

- 32-bit CompactPCI bus on P1
- Pass-through connectors for rear I/O on P2
- 3.3V or 5V operation
- P47 power supply connector
- System slot on right

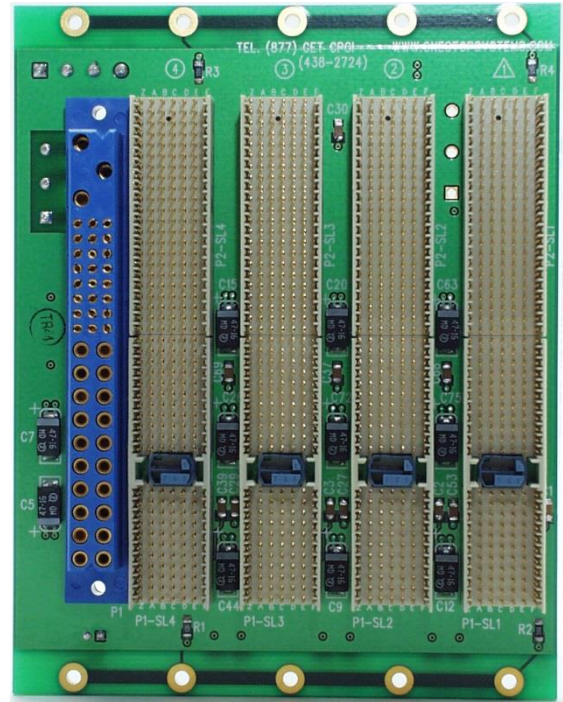

Specifications

Dimensions:	3U (5.067in.) high x 5-slots (4.0 in.) wide
Design:	8 layer (.125" thick)
4-Pin Connector:	+5V, +12V, GND
AC input connector	3-pin connector
Backplane Power Connector	P47
VIO	Defaulted to +5V, +3.3V is optional